

Features

- Three-stage purification system with KOHLER Konnect® voice activation technology lets you know your water usage and filter life.
- Reduces over 95% of perfluorooctanoic acid (PFOA) and perfluorooctane sulfonate (PFOS) in drinking water.
- Ultra-filter membrane technology reduces bacteria and virus in the water.
- Reduces contaminants such as bacteria, virus, lead, mercury, chlorine, select pharmaceuticals, VOC's and more.
- AC-powered operation—no batteries to replace (requires AC power outlet).
- Provides up to 792 gallons, or the equivalent of over 5,800 16.9 fl oz bottles of water (results may vary based on water pressure, temperature and incoming water quality).
- 0.65 gpm (2.46 l/min) maximum flow rate at 60 psi (4.14 bar).
- Filter head automatically turns off the water supply when cartridge is removed.
- Recommended for use with beverage faucets, such as WellSpring®.
- For cold water use only.
- Innovative sensor monitors water usage and displays that information on the KOHLER Konnect® app.

Material

- High-impact plastic construction.

Installation

- Under-sink.
- Quarter-turn twist cartridge for easy installation and replacement.
- Three-cartridge system includes two coconut shell-based carbon filters and an ultra-filter.
- *KOHLER Konnect® app pairs with Amazon Alexa and Google Home.
- Google, Google Home and Google Play are trademarks of Google LLC.

Included Components

Additional Components:

- K-21372 Carbon block CTO replacement filter
- K-21373 Carbon block VOC replacement filter
- K-21374 Ultra-filter replacement filter




Codes/Standards

CSA B483.1
NSF/ANSI 42
NSF/ANSI 53
NSF/ANSI 401
NSF Protocol P231

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

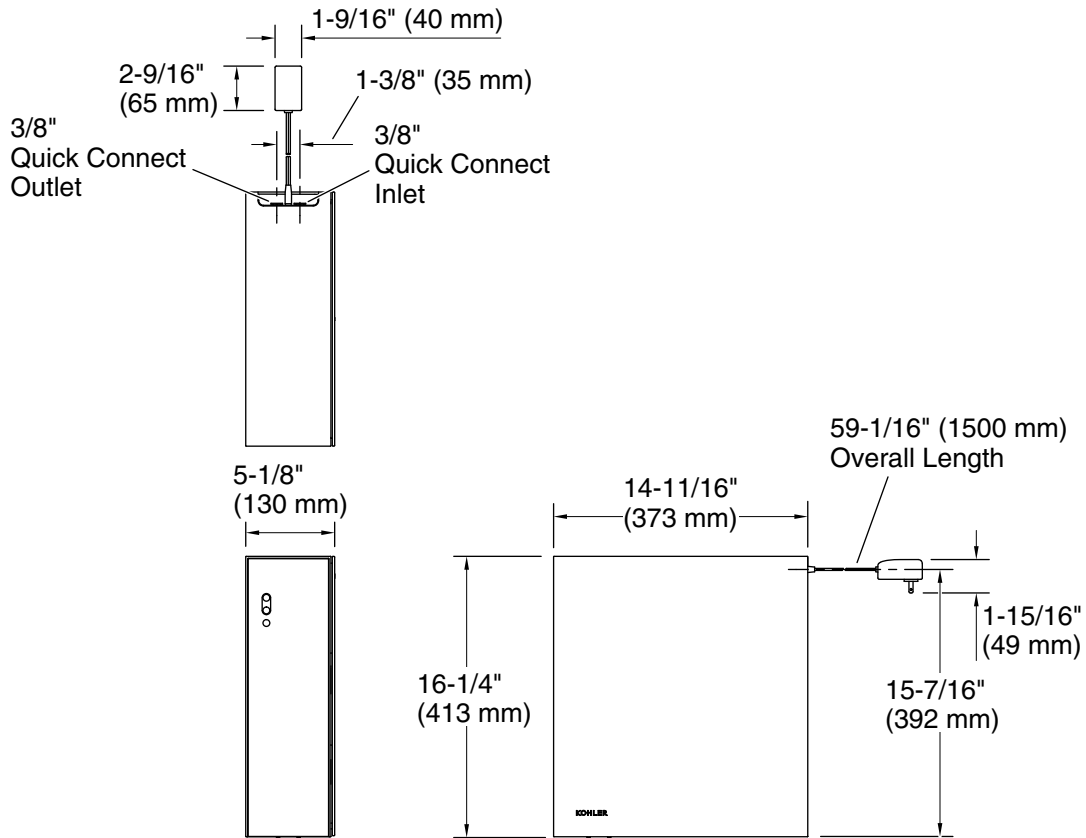

Technical Information

All product dimensions are nominal.

Faucet:

- Flow rate: 0.65 gal/min (2.5 l/min)
- Pressure: 60 psi (4.1 bar)
- Drain included: No

Notes

- Install this product according to the installation instructions.
- To prevent the risk of property damage, protect from freezing.
- For cold water use only.
- To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.